

### Technical Data Sheet

# Glastic® UTS 141

#### Typical characteristics

- NEMA GPO-2
- Alta resistencia
- Resistente al fuego cumple con UL94 VO

#### Typical industries


- Sistemas de conmutación
- Sector eléctrico
- Componentes de aislamiento eléctrico
- Electrónica

	Test method	Unit	Guideline value
<b>General properties</b>			
Part Number			141
NEMA Grade LI 1-1989	NEMA LI-1		GPO-2
Standard Color			Red
UL Temperature Index - Electrical	UL 746B	°C	130
UL Temperature Index - Mechanical	UL 746B	°C	130
UL Recognition File Number			E23525
<b>Mechanical properties</b>			
Flexural Strength	ASTM D 790	psi	18,000
Flexural Strength @130°C	ASTM D 790	psi	6,000
Compressive Strength	ASTM D 695	psi	30,000
Tensile Strength	ASTM D 638	psi	8,000
IZOD Impact Strength (notched)	ASTM D 256	ft. lb./in.	8.0
Shear Strength	ASTM D 732	psi	14,000
<b>Thermal properties</b>			
Coefficient of Thermal Expansion	ASTM D 696	(in./in.°C) x 10-5	2
<b>Flame resistance properties</b>			
UL Subject 94	UL 94		V0
Ignition Time		sec.	75
Burn Time		sec.	85
<b>Physical properties</b>			



	Test method	Unit	Guideline value
Water Absorption	ASTM D 570	% by wt.	0.8
Specific Gravity	ASTM D 792		1.8
<b>Dielectrical properties</b>			
Electrical Strength - Perpendicular S/T in Air	ASTM D 149	Vpm	300
Electrical Strength - Parallel S/S in Oil	ASTM D 149	kV	40
Arc Resistance	ASTM D 495	sec.	130
IEC Track Resistance (CTI)	UL 746A	V	600+
Permittivity, 60 Hz	ASTM D 150		4.5
Dissipation Factor, 60 Hz	ASTM D 150		0.05

All of the information, suggestions, and recommendations pertaining to the properties and uses of the Röchling Glastic Composites products described herein are based upon tests and data believed to be accurate; however, the final determination regarding the suitability of any material described herein for the use contemplated, the manner of such use, and whether the use infringes any patents is the sole responsibility of the user. THERE IS NO WARRANTY, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Under no circumstances shall we be liable for incidental or consequential loss or damage. Glastic® is a registered trademark of Röchling Glastic Composites. UL® is a registered trademark of Underwriters Laboratories, Inc.

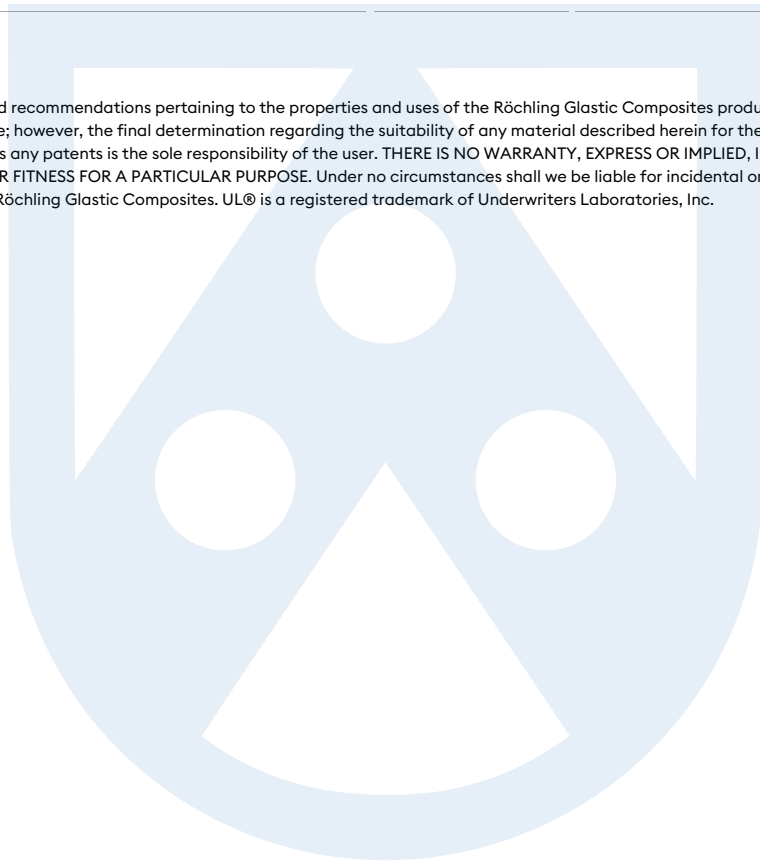

**Röchling Industrial Cleveland, LP**

4321 Glenridge Road • 44121 Cleveland/United States (US) • Tel. +1 216 486-0100  
[info@glastic.com](mailto:info@glastic.com) • [www.roechling.com/cleveland](http://www.roechling.com/cleveland)

Print: 27/07/2024 • Release: 20/09/2023 • Version: 1.0  
 PIM-Version: 37 • PIM-ID: 715325 • PIM-Code: 37-23-7.6.8-7.11.7.8-6

