

Technisches Datenblatt

Polystone[®] M Oil Filled - ASTM

Typische Eigenschaften

- Geringer Gleitreibungskoeffizient
- Selbstschmierend
- Gute Abrieb- und Verschleißfestigkeit
- Gute Schlagzähigkeit

Typische Industrien


- Fördertechnik & Automation

	Testverfahren	Einheit	Wert
Allgemeine Eigenschaften			
Dichte	ASTM D792	g / cm ³	0.94
Water Absorption	ASTM D570	%	<0.01
Mechanische Eigenschaften			
Verschleißfestigkeit	Sand-slurry		100
Härte	ASTM D2240	Shore D	62 - 66
Tensile Strength at yield 73°F	ASTM D638	psi	3000
Tensile Modulus	ASTM D638	psi	100000
Reißdehnung	ASTM D638	%	>260
Flexural Strength	ASTM D790	psi	3200
Compressive Strength	ASTM D695	psi	2900
Coefficient of Friction, Dynamic			0.10-0.12
Coefficient of Friction, Static			0.15-0.17
Thermische Eigenschaften			
CTE, linear	ASTM D696	in/in/°F	1.1x10 ⁻⁴
Melting Point		°F	266 - 275
Maximum Service Temperature, Air		°F	180
Heat Deflection Temperature 264psi	ASTM D648	°F	108
Flammability, UL94		1/8 inch	HB
Elektrische Eigenschaften			



	Testverfahren	Einheit	Wert
Dielektrizitätszahl	ASTM D150	1MHz	2.3
Oberflächenwiderstand	internal	Ω/sq	$>10^{12}$
Compliance properties			
FDA			Yes
NSF			No
USDA			Yes

The data stated above are average values ascertained by statistical tests on a regular basis. The data above are provided purely for information and shall not be regarded as binding unless expressly agreed in a contract of sale.

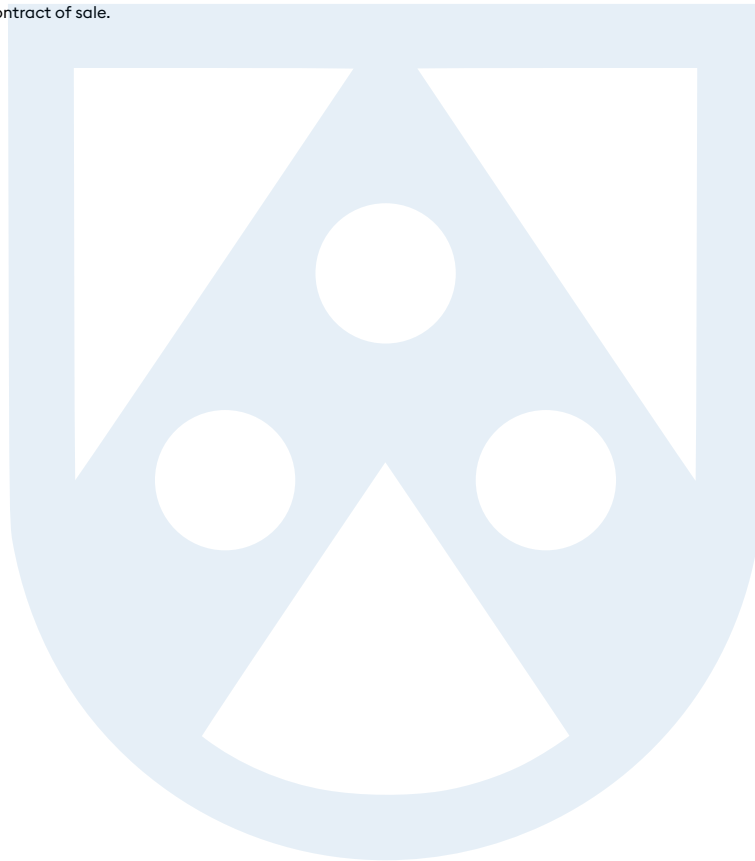

Röchling Industrial Gastonia, LP

903 Gastonia Technology Parkway • 28034 Dallas/United States (US) • Tel. +1 704 922-7814
 info.gastonia@roechling.com • www.roechling.com/industrial/rep-us

Print: 03/09/2024 • Release: 08/04/2024 • Version: 1.0
 PIM-Version: 32 • PIM-ID: 717947 • PIM-Code: 32-19-12.10.126.162-11-2

